



PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Luciano LENZINI et al.

Group Art Unit: 2661

Application No.: 10/630,971

Examiner: Not yet assigned

Confirmation No.: 1843

Filed: July 31, 2003

Attorney Dkt. No.: 60091.00206

For: DATA TRANSMISSION METHOD, SYSTEM, BASE STATION AND
SUBSCRIBER STATION

CLAIM FOR PRIORITY UNDER 35 USC § 119

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

December 17, 2003

Sir:

The benefit of the filing dates of the following prior foreign application filed in the following foreign country is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:


Finnish Patent Application No. **20030724** filed on **May 14, 2003** in **Finland**

In support of this claim, certified copy of said original foreign application is filed herewith.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document.

Please charge any fee deficiency or credit any overpayment with respect to this paper to Counsel's Deposit Account No. 50-2222.

Respectfully submitted,



Douglas H. Goldhush
Registration No. 33,125

Customer No. 32294
SQUIRE, SANDERS & DEMPSEY LLP
14TH Floor
8000 Towers Crescent Drive
Tysons Corner, Virginia 22182-2700
Telephone: 703-720-7800
Fax: 703-720-7802

DHG:kbd

Enclosure: Priority Document (1)

PATENTTI- JA REKISTERIHALLITUS
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 26.5.2003

ETUOIKEUSTODISTUS
PRIORITY DOCUMENT



Hakija
Applicant

Nokia Corporation
Helsinki

Patenttihakemus nro
Patent application no

20030724

Tekemispäivä
Filing date

14.05.2003

Kansainvälinen luokka
International class


H04L

Keksinnön nimitys
Title of invention

"Data transmission method, system, base station and subscriber station"
(Tiedonsiirtomenetelmä, järjestelmä, tukiasema ja tilaaja-asema)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä Patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.


Pirjo Kalla
Tutkimussihteeri

Maksu 50 €
Fee 50 EUR

Maksu perustuu kaupp- ja teollisuusministeriön antamaan asetukseen 1027/2001 Patentti- ja rekisterihallituksen maksullisista suoritteista muutoksineen.

The fee is based on the Decree with amendments of the Ministry of Trade and Industry No. 1027/2001 concerning the chargeable services of the National Board of Patents and Registration of Finland.

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328
FIN-00101 Helsinki, FINLAND

Data Transmission Method, System, Base Station and Subscriber Station

Field

The invention relates to a data transmission method in a communication system, the system comprising at least one base station and at least one subscriber station, which subscriber station allocates capacity for connections. The invention also relates to a data transmission system, a base station and a subscriber station. The invention relates especially to packet transmission.

Background

Modern access systems support different higher layer protocols, which define the format and order of messages exchanged between two or more communication entities, as well as the actions taken on the transmission and/or reception of a message. The central task of the Medium Access Control (MAC) protocol is to allocate channel resources, typically radio channel resources. The MAC protocol defines how and when an access point or a subscriber unit may transmit on the channel. The MAC protocol includes required procedures for interfaces to provide guaranteed services to upper protocol layers.

In a centrally controlled access system, the access point is responsible for allocating capacity to subscriber stations on the uplink channel, i.e. for deciding when and for how long each subscriber station is allowed to transmit on the channel. The access point typically announces its scheduling decisions by transmitting control messages, sometimes called maps, which typically are broadcasted to all subscriber stations. These messages usually consist of a list of information elements, each one defining a capacity grant, specified i.e. by a starting time and a time frame for a transmission, addressed to a specific entity defined by the protocol.

For the end user the most important thing in communication networks is naturally that he can be satisfied with the end-to-end services he uses. An end-to-end service sets requirements regarding the QoS. The requirements are mapped to the protocol hierarchy levels. For enabling a mapping between different hierarchy levels, the QoS requirements are usually classified.

The QoS requirements have to be fulfilled connection-specifically. However, in centrally controlled access systems capacity is typically granted subscriber station-specifically. Additionally, it should be noted that in many cases, one subscriber station may have several connections simultaneously.

- 5 These connections may originate from more than one user equipment, and they have a defined QoS, which may be different for each connection. Thus there is a problem how QoS requirements can be fulfilled for each connection.

Brief description of the invention

An object of the invention is to provide an improved data transmission method, a system, a base station and a subscriber station. According to
10 an aspect of the invention, there is provided a data transmission method in a communication system, the system comprising at least one base station and at least one subscriber station, which subscriber station allocates capacity for connections, the method comprising: transmitting from a subscriber station at
15 least one capacity request message, granting capacity subscriber station-specifically by a base station, transmitting at least one capacity grant message from the base station, allocating granted capacity connection-specifically by the subscriber station, transmitting from the subscriber station at least one message which message comprises information on previous capacity re-
20 quests, transmitting data from the subscriber station according to a capacity allocation, keeping track by the base station on capacity request messages, capacity grant messages and received transmissions.

According to another aspect of the invention, there is provided a data transmission method in a communication system, the system comprising
25 at least one base station and at least one subscriber station, which subscriber station allocates capacity for connections, the method comprising: determining communication groups, determining a group priority order, transmitting at least one capacity request message from a subscriber station, granting capacity subscriber station-specifically by a base station, transmitting at least one ca-
30 pacity grant message from the base station, scheduling connections by the subscriber station on the basis of communication groups, group priority order and granted capacity, transmitting from the subscriber station at least one message, which message comprises information on previous capacity re-
35 quests, transmitting data from the subscriber station, which data is related to a connection scheduling, keeping track by the base station on capacity request messages, capacity grant messages and received transmissions.

According to another aspect of the invention, there is provided a communication system, the system comprising: means for transmitting capacity request messages, means for granting capacity subscriber station-specifically, means for transmitting capacity grant messages, means for allocating granted capacity connection-specifically, means for transmitting messages, which messages comprise information on previous capacity requests, means for transmitting data according to the capacity allocation made by a subscriber station, means for keeping track on request messages, capacity grant messages and received transmissions.

According to another aspect of the invention, there is provided a communication system, the system comprising: means for grouping the connections into predetermined communication groups, means for transmitting capacity request messages, means for granting capacity subscriber station-specifically, means for transmitting capacity grant messages, means for scheduling connections on the basis of the communication groups, predetermined group priority order and the granted capacity, means for transmitting messages, which messages comprise information on previous capacity requests, means for transmitting data according to a connection scheduling, means for keeping track on request messages, capacity grant messages and received transmissions.

According to another aspect of the invention, there is provided a base station of a communication system, the base station comprising: means for granting transmission capacity subscriber station-specifically, means for transmitting capacity grant messages to one or more subscriber stations, means for keeping track on capacity request messages received from the subscriber stations, capacity grant messages sent by the base station and data transmissions received from the subscriber stations.

According to another aspect of the invention, there is provided a subscriber station of a communication system, which subscriber station allocates capacity for connections, the subscriber station comprising: means for transmitting capacity request messages of one or more connection, means for receiving capacity grant messages from a base station, means for allocating connection-specifically the capacity granted by the base station, means for transmitting messages, which messages comprise information on previous capacity requests of the subscriber station, means for transmitting data according to the capacity allocation made by the subscriber station.

According to another aspect of the invention, there is provided a subscriber station of a communication system which subscriber station allocates capacity for connections, the subscriber station comprising: means for transmitting capacity request messages of one or more connection, means for
 5 grouping the connections into predetermined communication groups, means for scheduling the connections on the basis of the communication groups, a predetermined group priority order and the capacity granted by a base station, means for transmitting messages which messages comprise information on previous capacity requests, means for transmitting data according to a connection
 10 scheduling.

According to another aspect of the invention, there is provided a base station of a communication system configured to receive capacity request messages from one or more subscriber stations, grant transmission capacity subscriber station-specifically, transmit capacity grant messages to one or
 15 more subscriber station, keep track on request messages received from the subscriber stations, capacity grant messages sent by the base station and data transmissions received from the subscriber stations.

According to another aspect of the invention, there is provided a subscriber station of a communication system which subscriber station allocates capacity for connections, configured to transmit capacity request messages of one or more connections, allocate connection-specifically the capacity
 20 granted by a base station, transmit messages which messages comprise information on previous capacity requests, transmit data from the subscriber station according to the capacity allocation made by the subscriber station.

Further embodiments of the invention are described in the dependent claims. The method and system of the invention provide several advantages. In an embodiment of the invention QoS requirements can be fulfilled connection-specifically. Another advantage is that a base station can control the amount of data transmission in comparison with data requests in order to
 25 avoid a mismatch between the capacity the base station has granted and the data it has received.
 30

List of drawings

In the following, the invention will be described in greater detail with reference to the embodiments of the invention and the accompanying drawings, in which
 35

Figure 1 shows an example of a transmission system,

Figures 2A-B illustrate prior art examples of GPSS (grant per subscriber station) operation,

Figure 3 is a flow chart,

Figure 4 is another flow chart,

5 Figure 5 shows an example of operation of a subscriber station and a base station,

Figure 6 shows an example of processing of non-UGS service class,

Figure 7 shows an example of a base station,

10 Figure 8 shows an example of a subscriber station

Description of embodiments

With reference to Figure 1, we examine a simplified example of a data transmission system, in which the embodiments of the invention can be applied. Figure 1 is a simplified illustration of a digital data transmission system
 15 where the solution according to the invention is applicable. Figure 1 shows part of a communication system that comprises a base station (BS) 102, which has a bi-directional radio link 100 to a subscriber station 104. The subscriber station (SS) is a generalized equipment set providing connectivity between user terminals and a base station. A subscriber station is usually a fixed network
 20 element as well as a base station. The connection between a subscriber station and a user terminal may comprise intermediate network elements, which, being non-relevant to understanding and describing the invention, are not shown.

An example of an environment the system according to Figure 1 can
 25 be applied to is an office building: a subscriber station is typically located on the rooftop and user terminals have connections to a base station via the subscriber station. The subscriber station in Figure 1 has bi-directional 110, 112 links to user terminals 106, 108. These links can be radio links or implemented as fixed links. From the transceivers of the subscriber station there is a con-
 30 nection to an antenna unit, which establishes the bi-directional radio link 100. One exemplary system where the arrangement according to Figure 1 is used is a Fixed Broad Band Wireless Access System (802.16 standard), which can provide wireless high-data-rate connections. In practice, systems typically compris
 35 plurality of subscriber stations that communicate with each base station. This is called a point-to-multipoint topology. The user terminal can be portable or fixed.

The base station is connected via a connection 114 to a backbone network 116. Backbone-concept means a primary connectivity structure of a hierarchical distributed system, in which all systems with connectivity to an intermediate system are assured of connectivity to each other. A backbone network in this example can be for instance an IP-network (Internet). Typically, different networks are connected to each other with a router 118. A router is a device that forwards packets from one network to another on the basis of network-layer information and a routing table.

In this application the invention is explained with the aid of examples shown in a communication system according to the Fixed Broadband Wireless Access Systems standard. These examples do not restrict the applicability of the embodiments of the invention to the Fixed Broadband Wireless Access Systems standard but the invention can be applied to the systems comprising required requisite.

Figure 2A shows a prior art example of GPSS (grant per subscriber station) operation. The system comprises a subscriber station SS_i and a base station BS. The subscriber station has two resource requests for two separate connections A 202A and B 204B. These connections may represent connections of a single user terminal, or two connections of a single user terminal with different quality requirements. The subscriber station sends a capacity request 206A of 300 bytes for the first connection and a capacity request 208A of 500 bytes for the second connection. The base station decides to allocate first the second connection B 250 bytes 210 and sends a grant message 212A to the subscriber station. The subscriber station decides to schedule the granted capacity differently: it allocates first 250 bytes to the first connection A. The first connection still needs 50 bytes more, which is marked on Figure 1 by number 214. The second connection still needs all of the 500 bytes requested. The subscriber station transmits the first connection's data to the base station 216.

As can be seen in Figure 2A, there is a mismatch between the capacity grant and the sent data: the base station granted resources for the first connection but the subscriber station allocated the resources to the second connection. However, as long as the total amount of bandwidth required by the SS_i corresponds the total amount of bandwidth granted by the base station, no bad deadlock situations typically arises.

Figure 2B shows another prior art example of GPSS operation. The system comprises a subscriber station SS_i and a base station BS. The sub-

scriber station has two resource requests for two separate connections A 202B and B 204B. The subscriber station sends a capacity request of the first connection A of 300 bytes 206B and a capacity request of the second connection B of 500 bytes 208B. However, the base station never receives the capacity request message 208B and thus decides to allocate 250 bytes to the first connection A and sends a capacity grant message 212B. In Figure 2B, the capacity request messages received by the base station are marked with numbers 220 and 222. The capacity grant decisions made by the base station are marked with numbers 224 and 226.

Since the subscriber station decides to allocate the granted capacity to the connection B, marked in Figure 2B with a number 218, and sends to the base station a data message 228 comprising the data of connection B, there is a mismatch between the capacity granted by the base station and the data it has received.

Figure 3 is a flow chart, with which an embodiment of the invention is explained. The embodiment is a method of scheduling transmission of packets from different connections in a granted uplink transmission interval. The embodiment introduces a method of attenuating or even eliminating disadvantages brought by the mismatch problem. The method can be called a three-way handshake. The three-way handshake is especially suitable for systems, where capacity is requested connection-specifically and capacity is granted subscriber station-specifically and where capacity requests can get lost.

The communication system where the method can be implemented comprises at least one subscriber station and at least one base station. The subscriber station (SS) is a generalized equipment set providing connectivity between a user terminal and a base station. The user terminal can be portable, fixed or mounted in a vehicle. The base station has a connection to all subscriber stations under its control. The base station checks the addresses in the received messages and retain only the addresses of the received messages.

In the uplink, the subscriber stations share the radio resources based on capacity demand. This resource sharing may be according to a burst-mode FDD (Frequency Division Duplex) system, where each subscriber station can transmit during defined time periods granted by the base station, for example. Alternatively, the resource sharing can be implemented as a conventional FDD, a TDD (Time Division Duplex) or CDD (Code Division Duplex) system, or as a combination of these.

The system preferably uses a centrally controlled access system where the access point (a base station, for instance) is responsible for allocating capacity to subscriber stations on the uplink channel, i.e. for deciding when and for how long the subscriber station is allowed to transmit on the channel.

- 5 The MAC protocol is one of upper layer protocols, which is used for this purpose.

The method starts from block 300. In block 302 at least one capacity request message is transmitted by a subscriber station connection-specifically. Preferably, a capacity request message is transmitted by a subscriber station
10 for each connection having data to be transmitted. A combined capacity request message, where multiple requests are combined into a single capacity request message is also applicable. A request message type is typically defined by the standard used. It should be noticed that capacity request messages may get lost due to collisions with transmissions from other subscriber
15 stations, for example.

In block 304 capacity is granted by the base station. The base station makes the decision on the capacity grant on the grounds of received capacity requests, which may arrive from several subscriber stations. However, the base station is not obliged to grant as much capacity as requested, but it
20 can make a divergent decision instead. A typical situation is that subscriber stations need more capacity for the connections than is available at the moment and the base station divides the available capacity between different subscriber stations according to an algorithm, which is on the priority of transmissions, for example.

25 In block 306 at least one capacity grant message is transmitted by the base station. A grant message type is typically defined by the standard used.

In block 308 the granted capacity is allocated by the subscriber station. The capacity is allocated connection-specifically. A subscriber station can
30 allocate or schedule to connections the radio capacity the base station has granted independently from the decision of the base station.

In block 310 at least one message comprising information on previous capacity requests is transmitted. This makes it possible for the base station to update its information on capacity requests in comparison with received
35 transmissions. The information is, for instance, the amount of previously requested bandwidth connection-specifically.

In block 312 the subscriber station transmits data to the base station according to the capacity allocation decision made by the subscriber station.

In block 314 the base station keeps track on capacity request messages, capacity grant messages and received transmissions. The base station
 5 uses information on request messages, capacity grant messages and received transmissions for avoiding mismatch between granted capacity and data received from the subscriber station. This as well as the role of the subscriber station is explained in further detail with the aid of Figure 5. Figure 5 is explained in connection with Figure 4.

10 The method ends in block 316. The arrow 318 depicts one possibility of repeating the method.

In the following, another embodiment of the three-way handshake method is described with the aid of Figure 4.

The method starts from block 400. In block 402 communication
 15 groups are determined. One uplink scheduling service standard is used as an example here, but for a person skilled in the art it is obvious that this example does not restrict the applying of the method in any way.

Generally speaking, scheduling services are designed to improve the efficiency of the poll/grant process. By specifying a scheduling service and
 20 its associated QoS parameters, the base station can anticipate the throughput and latency needs of the uplink traffic and provide polls and/or grants at the appropriate times. The basic services in this example, as defined in the exemplary IEEE 802.16 standard, are Unsolicited Grant Service (UGS), Real-Time Polling Service (rtPS), Non-Real-Time Polling Service (nrtPS) and Best Effort
 25 (BE) service. Each service is intended for a specific type of data flow.

The Unsolicited Grant Service (UGS) is designed to support real-time service flows that generate fixed size data packets on a periodic basis, such as Voice over IP without silence suppression. The service offers fixed size grants on a real-time periodic basis, which eliminate the overhead and
 30 latency of SS requests and assure that grants are available to meet the flow's real-time needs.

The Real-Time Polling Service (rtPS) is designed to support real-time service flows that generate variable size data packets on a periodic basis, such as MPEG video. The service offers real-time, periodic, unicast request
 35 opportunities, which meet the flow's real-time needs and allow the SS to specify the size of the desired grant. This service requires more request overhead

than the UGS, but supports variable grant sizes for optimum data transport efficiency.

The Non-Real-Time Polling Service (nrtPS) is designed to support non real-time service flows that require variable size data Grant Burst Types on a regular basis, such as high bandwidth FTP (File Transfer Protocol). The service offers unicast polls on a regular basis which assures that the flow receives request opportunities even during network congestion.

The intent of the Best Effort (BE) service is to provide efficient service for the best effort traffic. In order for this service to work correctly, the Request/Transmission Policy setting should be such that the subscriber station is allowed to use contention request opportunities.

In the example used here, the communication groups are determined on the basis of the basic services shortly presented above.

More details about scheduling services can be found in the literature and standards of the field.

In block 404 a group priority order is determined. The priority order can be determined on the basis of the previously determined communication groups or the order can be determined independently. In most cases, the most straightforward solution is that the order is determined on the basis of the groups themselves, especially when the groups are QoS-groups, because in that case the priority order is determined in the used standard.

In block 406 at least one capacity request message is transmitted by a subscriber station connection-specifically. In the current example, a separate capacity request message is transmitted from the subscriber station for each connection having data to be transmitted. A request message type is typically defined by the used standard and can thus differ from the depicted example. It should be noticed that capacity request messages may get lost due to collisions with transmissions from other subscriber stations.

In block 408 capacity is granted by a base station. A base station makes the decision on the capacity grant on the grounds of arrived capacity requests. However, a base station is not obliged to grant as much capacity as requested, but it can make a divergent decision. A typical situation is that subscribers need more capacity than is available at the moment and a base station divides the free capacity between different connections according to some algorithm, which is specifically for example on the priority of transmissions.

In block 410 at least one capacity grant message is transmitted by a base station. A grant message type is typically defined by the standard used.

In block 412 connections are scheduled by a subscriber station on the basis of the communication groups, group priority order and granted capacity.

A subscriber station can allocate or schedule the radio capacity a base station has granted independently from the decision of a base station.

In block 414 at least one message comprising information on previous capacity requests is transmitted. The information is, for instance, the number of previously requested bandwidths connection-specifically.

The function of a subscriber station, as well as the method of the invention (in other words blocks 412 and 414 and also relatively blocks 308 and 310 in Figure 3) is explained by the aid of the example shown in Figure 5. The number of messages, the amount of bytes, as well as other analogous details marked in Figure 5, are only examples and they do not restrict the application of the method in any way.

The subscriber station SS_i has two resource requests for two separate connections 502, 504. The subscriber station sends a capacity request message 506 of the first connection A of 300 bytes and a capacity request message 508 of the second connection B of 500 bytes. The capacity request messages also comprise a connection identifier so that the base station can recognize different connections. The base station does not, however, receive the second request message and therefore the base station decides to allocate the first connection 250 bytes and sends a capacity grant message 514 to the subscriber station. The subscriber station decides to allocate the granted capacity differently: it allocates first the second connection B 250 bytes. The second connection still needs 250 bytes more, which is marked on the figure by number 516.

Next, the subscriber station transmits new aggregate request messages. The number of messages varies according to the situation. Usually the subscriber station transmits as many aggregate request messages as there are connections needing capacity. An aggregate request message carries an update, which replaces the information on the bandwidth needs of the connection at the base station. In Figure 5 the first (connection A) aggregate request message (aggregate PDU, Protocol Data Unit) is marked with number 518 and the second (connection B) is marked with number 520. Since a subscriber sta-

tion scheduler is aware of the status of the uplink buffers, the backlog can be given to a base station using an aggregate PDU. The length of a PDU is typically 6 bytes.

As can be seen in Figure 5, the bytes needed for identifiers or headers are included in the capacity granted and thus there is slightly less capacity available for actual data. Nevertheless, the difference is not considerable and the attained benefit is remarkable, as can be seen next.

In block 416 the subscriber station transmits data to the base station according to a connection scheduling (or allocation) made by the subscriber station. In the example of Figure 5, this is marked by a message 522.

In block 418 (block 314 in Figure 3), the base station keeps track on request messages, capacity grant messages and received transmissions. The base station uses information on request messages, capacity grant messages and received transmissions for avoiding mismatch between granted capacity and data received from a subscriber station.

This is also explained in further detail with the aid of Figure 5. The first table 510 shows the bookkeeping of the follow-up after the base station has received the first capacity request message 506. As can be seen, the base station did not receive the second capacity request message 508.

The second table 512 shows that the base station grants 250 bytes for the first connection (connection A). The third table 524 depicts the situation after aggregate request messages: requests for both connections are updated to the current situation as well as received messages. This is how a base station can track the requests, grants and transmissions and the probability of a mismatch (see Figures 2A-B) is smaller and can usually be avoided. The base station typically saves in the memory the current situation concerning capacity requests for each connection, granted capacity for each connection and data received from each connection. The bookkeeping is beneficial in many situations: when a capacity request never reaches the base station or the subscriber station allocates, for some reason, the capacity differently from the grant decision made by the base station.

It is obvious for a person skilled in the art that there are also other possibilities of implementing the tracking, but a memory table is quite an advantageous solution.

The method ends in block 420. Arrow 422 depicts one possibility of repeating the method.

In the following, a more detailed example of one embodiment of the three-way handshake method is explained according to Figure 6. Figure 6 depicts an example of processing non-UGS connections, in other words Real-Time Polling Service (rtPS), Non-Real-Time Polling Service (nrtPS) and Best Effort (BE) service connections.

The process starts from block 600. In block 602 it is searched if there are non-UGS connections waiting in a buffer. It is assumed that the connection grant implicitly acknowledges the reception at the base station of bandwidth requests depicted by a PDU header previously transmitted.

If the buffer is not empty, a non-UGS connection is selected from the queue in block 604. Typically, the principle how connections are picked from the queue is a Weighted Round Robin order (WRR). A Round Robin algorithm is a cyclical multiplexing technique, which is often used in allocating resources in fixed-size time slices.

Deficit Round Robin algorithm is a variation of the weighted Round Robin (WRR) that allows connections with variable packet lengths to share the link bandwidth. Packet-specific implementations are usually suggested to avoid fragmentation. In a Deficit Round Robin algorithm, each connection is characterized by the quantity of packets that the connection should ideally transmit during a round ϕ and a deficit variable Δ . When a backlogged connection is serviced, it is allowed to transmit a burst of packets of an overall length not exceeding $\phi + \Delta$. When a connection is not able to send a packet in a round because the packet is too large, the bytes which could not be used for transmission in the current round are saved in the connection's deficit variable, and are therefore available to the same connection in the next round.

In block 606 it is clarified if the connection is served for the first time. If the connection in question has been served earlier, the process continues in block 624 and 612. In block 624 an update aggregate request message is added to the burst, which replaces the information on the bandwidth needs of the connection at the base station.

Otherwise, the process continues in block 608, there it is clarified if the requested capacity is lower than the current backlog. If it is, a GM (Grant Management) sub-header is added to the first PDU with an incremental request in block 610. A GM sub-header is a special request message that is embedded in a data-PDU. It carries an incremental request, in other words, a request that is added to the previous ones. A request message can also be

used, but GM sub-headers are more preferable since they are shorter than request messages. Attention should be paid to the fact that GM sub-headers cannot always be used since they are a specific facility of the 802.16 standard.

In block 612 one or more PDU are added to a burst according to a
5 Round Robin algorithm.

Next it is found out, whether there is still capacity available, block 614. If there is no longer enough capacity, the processed burst is transmitted in block 618. If there still is capacity, the process begins again, which is marked in Figure 6 by two blocks containing the A 616, 622. The process ends in block
10 620.

Figure 7 illustrates a simplified exemplary embodiment of a base station in relation to the functionalities required by the three-way handshake method described above. It is obvious to a person skilled in the art that the base station can deviate from what is depicted in Figure 7.

15 In this case RF parts 700 are common for both a receiver and a transmitter of the base station. It is obvious that they can also be separate components. The RF parts may also comprise a power amplifier, which amplifies a received signal that has been attenuated in a radio path. Typically the RF parts of a receiver down-convert the received signal to an intermediate frequency and then to a base band frequency or straight to the base band frequency. In a transmitter the signal is up-converted to a carrier frequency. In
20 digital systems the RF parts typically comprise an analogue-to-digital/digital-to-analogue converter.

From the RF-parts there is a connection to an antenna 706. The
25 transceiver uses the same antenna 706 for receiving and transmitting and therefore there is also a duplex filter to separate transmission and reception. The antenna may be an antenna array or a single antenna. Various other radio frequency functionalities, such as modulating/demodulating and error correction may be included in the RF part of the unit. The antenna may be an antenna array or a single antenna.
30

In the exemplary solution of Figure 7 additional functions of the base station are placed in a base band, BB, block 702 that is usually implemented as an ASIC (Application Specific Integrated Circuit) component. The base band block takes care of for instance, digital signal processing (DSP) functions, like coding and decoding, if required. Also modulation and demodulation
35

can be transacted in the base band block. The base band block may comprise a DSP-block for DSP-processing and/or a CPU-block (central processing unit).

In one embodiment of the invention, The BB-block contains a memory unit or it is connected to one. The memory unit is used for track keeping on request messages, capacity grant messages and received transmissions. The information can be stored, for instance, in a table format. Also capacity grant functions are carried out by the BB-block.

The control block 704 that, in this example, is part of the base band block carries out controlling the capacity grant process, the transmitting of capacity grant messages and track-keeping on request messages, capacity grant messages and received transmissions.

Figure 8 illustrates a simplified exemplary embodiment of a subscriber station in relation to the functionalities required by the three-way handshake method described above. It is obvious to a person skilled in the art that the subscriber station can deviate from what is depicted in Figure 8. In this case RF parts 800 are common for both a receiver and a transmitter of the subscriber station. It is obvious that they can also be separate components. The RF parts may also comprise a power amplifier, which amplifies a received signal that has been attenuated in a radio path. Typically the RF parts of a receiver down-convert the received signal to an intermediate frequency and then to a base band frequency or straight to the base band frequency. In a transmitter the signal is up-converted to a carrier frequency. In digital systems, the RF parts typically comprise an analogue-to-digital/digital-to-analogue converter.

From the RF-parts there is a connection to an antenna 806. The transceiver uses the same antenna 806 for receiving and transmitting and therefore there is also a duplex filter to separate transmission and reception. The antenna may be an antenna array or a single antenna. In a point-to-multipoint solution, such as the exemplary IEEE 802.16 standard, the subscriber station antenna may be a beam-forming antenna.

In the solution of Figure 8 additional functions of the subscriber station are placed in a base band, BB, block 802 that is usually implemented by an ASIC (Application Specific Integrated Circuit) component. The base band block takes care of for instance, DSP functions required.

In one embodiment of the invention, the control block 804 that, in this example, is part of the base band block carries out controlling the transmitting of capacity request messages, transmitting of messages comprising infor-

mation on previous capacity requests and transmitting of data according to a capacity allocation. The control block also allocates to different connections the capacity a base station has granted. A subscriber station scheduler, which typically schedules connections on the basis of service classes, is preferably
5 part of the control block.

The base station and the subscriber station are connected to each other typically via a radio connection for transmitting messages and data.

The disclosed functionalities of the described embodiments of the data transmission method can be advantageously implemented by means of
10 software located typically in the Digital Signal Processor or in the central processing unit, which both may be situated in the base band parts of a base station and in the base band parts of a subscriber station. The implementation solution can also be for instance an ASIC (Application Specific Integrated Circuit) component. A hybrid of these different implementations is also feasible.

15 Even though the invention is described above with reference to an example according to the accompanying drawings, it is clear that the invention is not restricted thereto but it can be modified in several ways within the scope of the appended claims.

We Claim

1. A data transmission method in a communication system, the system comprising at least one base station and at least one subscriber station, which subscriber station allocates capacity for connections, the method comprising:

5 transmitting from a subscriber station at least one capacity request message,

granting capacity subscriber station-specifically by a base station,
transmitting at least one capacity grant message from the base station,

10 allocating granted capacity connection-specifically by the subscriber station,

transmitting from the subscriber station at least one message which message comprises information on previous capacity requests,

15 transmitting data from the subscriber station according to a capacity allocation,

keeping track by the base station on capacity request messages, capacity grant messages and received transmissions.

2. A data transmission method in a communication system, the system comprising at least one base station and at least one subscriber station, which subscriber station allocates capacity for connections, the method comprising:

determining communication groups,
determining a group priority order,
25 transmitting at least one capacity request message from a subscriber station,

granting capacity subscriber station-specifically by a base station,
transmitting at least one capacity grant message from the base station,

30 scheduling connections by the subscriber station on the basis of communication groups, group priority order and granted capacity,

transmitting from the subscriber station at least one message, which message comprises information on previous capacity requests,

35 transmitting data from the subscriber station, which data is related to a connection scheduling,

keeping track by the base station on capacity request messages, capacity grant messages and received transmissions.

3. The method of claim 2, wherein the communication groups are determined on the basis of connection quality demands.

5 4. The method of claim 2, wherein a group priority order is defined on the basis of connection quality demands.

5. The method of claim 2, wherein the communication groups are UGS, rtPS, nrtPS and non-UGS service classes.

6. The method of claim 1, further comprising keeping track on messages and transmissions with the aid of a memory table.

7. The method of claim 1, wherein the message comprising information on previous capacity requests is an update message, which message replaces at the base station the previous information connection-specifically.

8. The method of claim 1, wherein the information on previous capacity requests is an update message, which message replaces the information on the bandwidth needs of the connection.

9. The method of claim 1, wherein the base station uses information on request messages, capacity grant messages and received transmissions for avoiding a mismatch between granted capacity and data received from a subscriber station.

10. A communication system, the system comprising:
 means for transmitting capacity request messages,
 means for granting capacity subscriber station-specifically,
 means for transmitting capacity grant messages,
 25 means for allocating granted capacity connection-specifically,
 means for transmitting messages, which messages comprise information on previous capacity requests,
 means for transmitting data according to the capacity allocation made by a subscriber station,
 30 means for keeping track on request messages, capacity grant messages and received transmissions.

11. A communication system, the system comprising:
 means for grouping the connections into predetermined communication groups,
 35 means for transmitting capacity request messages,
 means for granting capacity subscriber station-specifically,

means for transmitting capacity grant messages,

means for scheduling connections on the basis of the communication groups, predetermined group priority order and the granted capacity,

means for transmitting messages, which messages comprise information on previous capacity requests,

means for transmitting data according to a connection scheduling,

means for keeping track on request messages, capacity grant messages and received transmissions.

12. The system of claim 11, wherein the communication groups are put into a priority order.

13. The system of claim 11, wherein the communication groups are UGS, rtPS, nrtPS and non-UGS service classes.

14. The system of claim 10, further comprising means for keeping track on messages and transmissions with the aid of a memory table.

15. The system of claim 10, further comprising means for transmitting update messages comprising information on previous capacity requests, which messages replace at the base station the previous information on the connection.

16. The system of claim 10, further comprising means for using information on request messages, capacity grant messages and received transmissions for avoiding mismatch between granted capacity and data received from a subscriber station.

17. A base station of a communication system, the base station comprising:

means for granting transmission capacity subscriber station-specifically,

means for transmitting capacity grant messages to one or more subscriber stations,

means for keeping track on capacity request messages received from the subscriber stations, capacity grant messages sent by the base station and data transmissions received from the subscriber stations.

18. The base station of claim 17, further comprising means for keeping track on messages and transmissions with the aid of a memory table.

19. The base station of claim 17, further comprising means for using information on request messages, capacity grant messages and received

transmissions for avoiding a mismatch between granted capacity and data received from a subscriber station.

20. A subscriber station of a communication system, which subscriber station allocates capacity for connections, the subscriber station comprising:

means for transmitting capacity request messages of one or more connection,

means for receiving capacity grant messages from a base station,

means for allocating connection-specifically the capacity granted by the base station,

means for transmitting messages, which messages comprise information on previous capacity requests of the subscriber station,

means for transmitting data according to the capacity allocation made by the subscriber station.

21. A subscriber station of a communication system which subscriber station allocates capacity for connections, the subscriber station comprising:

means for transmitting capacity request messages of one or more connection,

means for grouping the connections into predetermined communication groups,

means for scheduling the connections on the basis of the communication groups, a predetermined group priority order and the capacity granted by a base station,

means for transmitting messages which messages comprise information on previous capacity requests,

means for transmitting data according to a connection scheduling.

22. The subscriber station of claim 20, wherein the communication groups are UGS, rtPS, nrtPS and non-UGS service classes.

23. The subscriber station of claim 20, further comprising means for transmitting update messages comprising information on previous capacity requests, which messages replace at the base station the previous information on the connection.

24. A base station of a communication system configured to receive capacity request messages from one or more subscriber stations,


grant transmission capacity subscriber station-specifically,
transmit capacity grant messages to one or more subscriber station,
keep track on request messages received from the subscriber sta-
tions, capacity grant messages sent by the base station and data transmis-
5 sions received from the subscriber stations.

25. A subscriber station of a communication system which sub-
scriber station allocates capacity for connections, configured to
transmit capacity request messages of one or more connections,
allocate connection-specifically the capacity granted by a base sta-
10 tion,
transmit messages which messages comprise information on previ-
ous capacity requests,
transmit data from the subscriber station according to the capacity
allocation made by the subscriber station.

(57) Abstract

The invention is related to a data transmission method in a communication system comprising: transmitting at least one capacity request message from a subscriber station, granting capacity subscriber station-specifically by a base station, transmitting at least one capacity grant message from the base station, allocating granted capacity connection-specifically by the subscriber station, transmitting from the subscriber station at least one message, which message comprises information on previous capacity requests, transmitting data from the subscriber station according to capacity allocation, keeping track by the base station on request messages, capacity grant messages and received transmissions.

(Figure 5)



L5

1/5



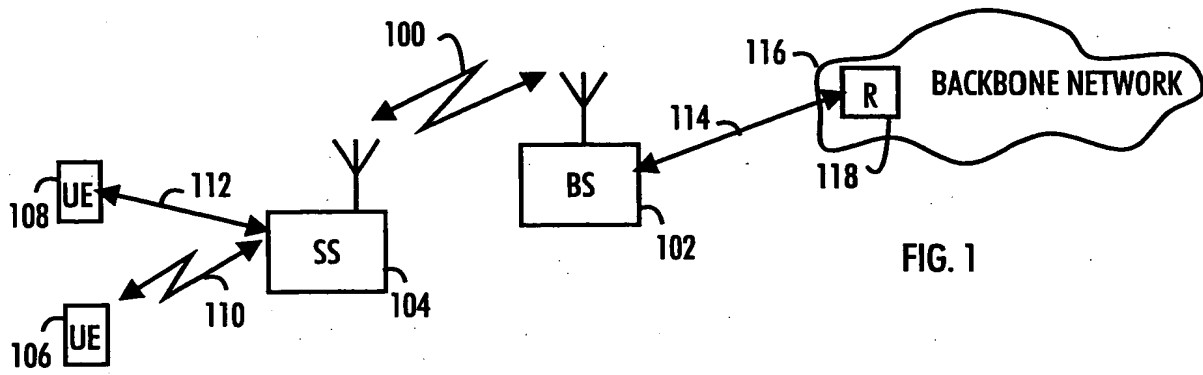


FIG. 2A

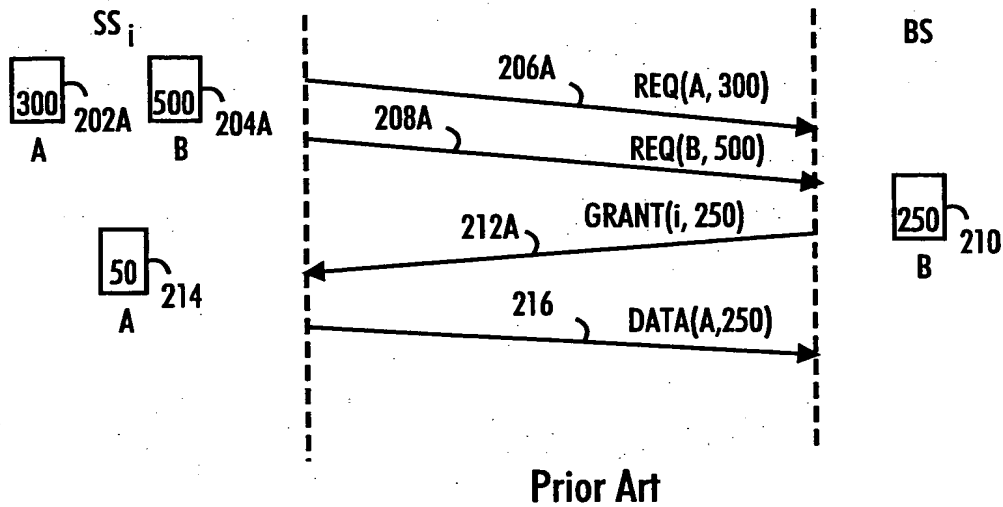

Prior Art

FIG. 2B

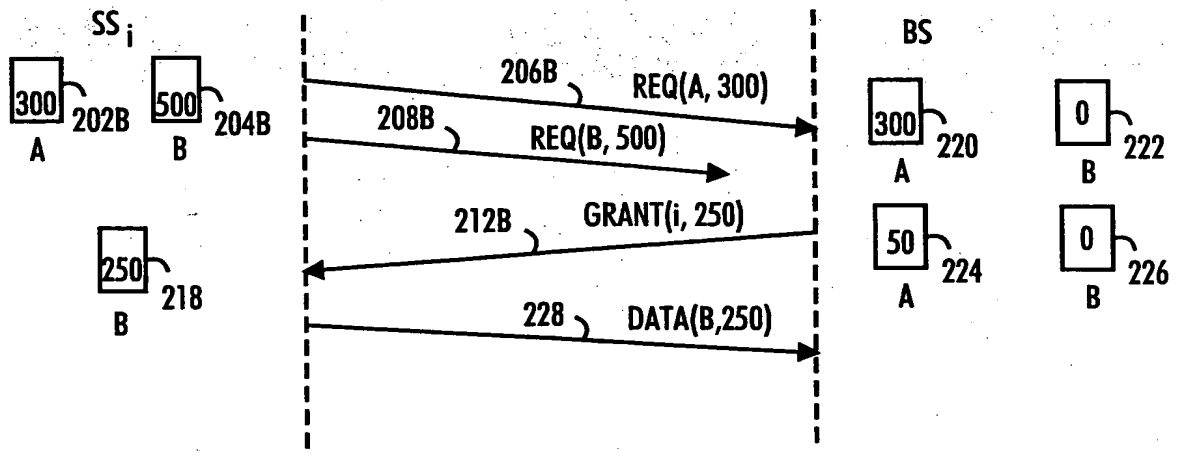

Prior Art

25

2/5

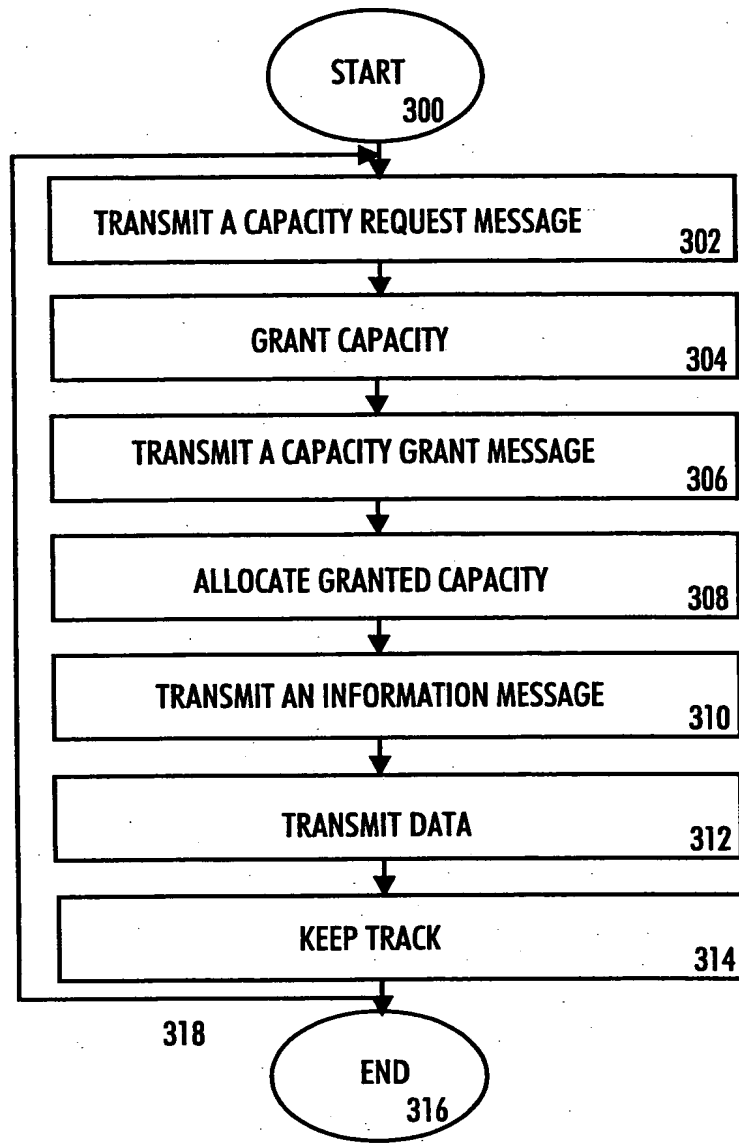


FIG. 3

L5

3/5

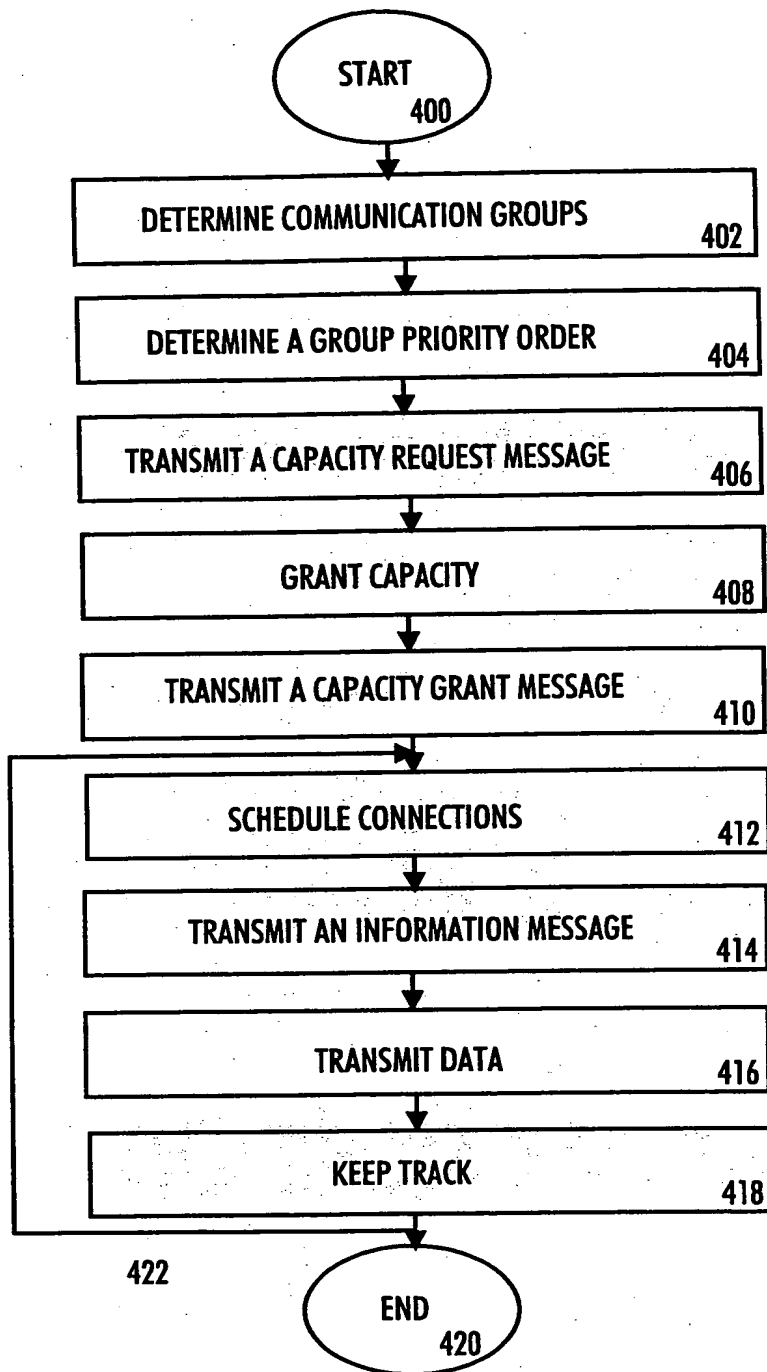


FIG. 4

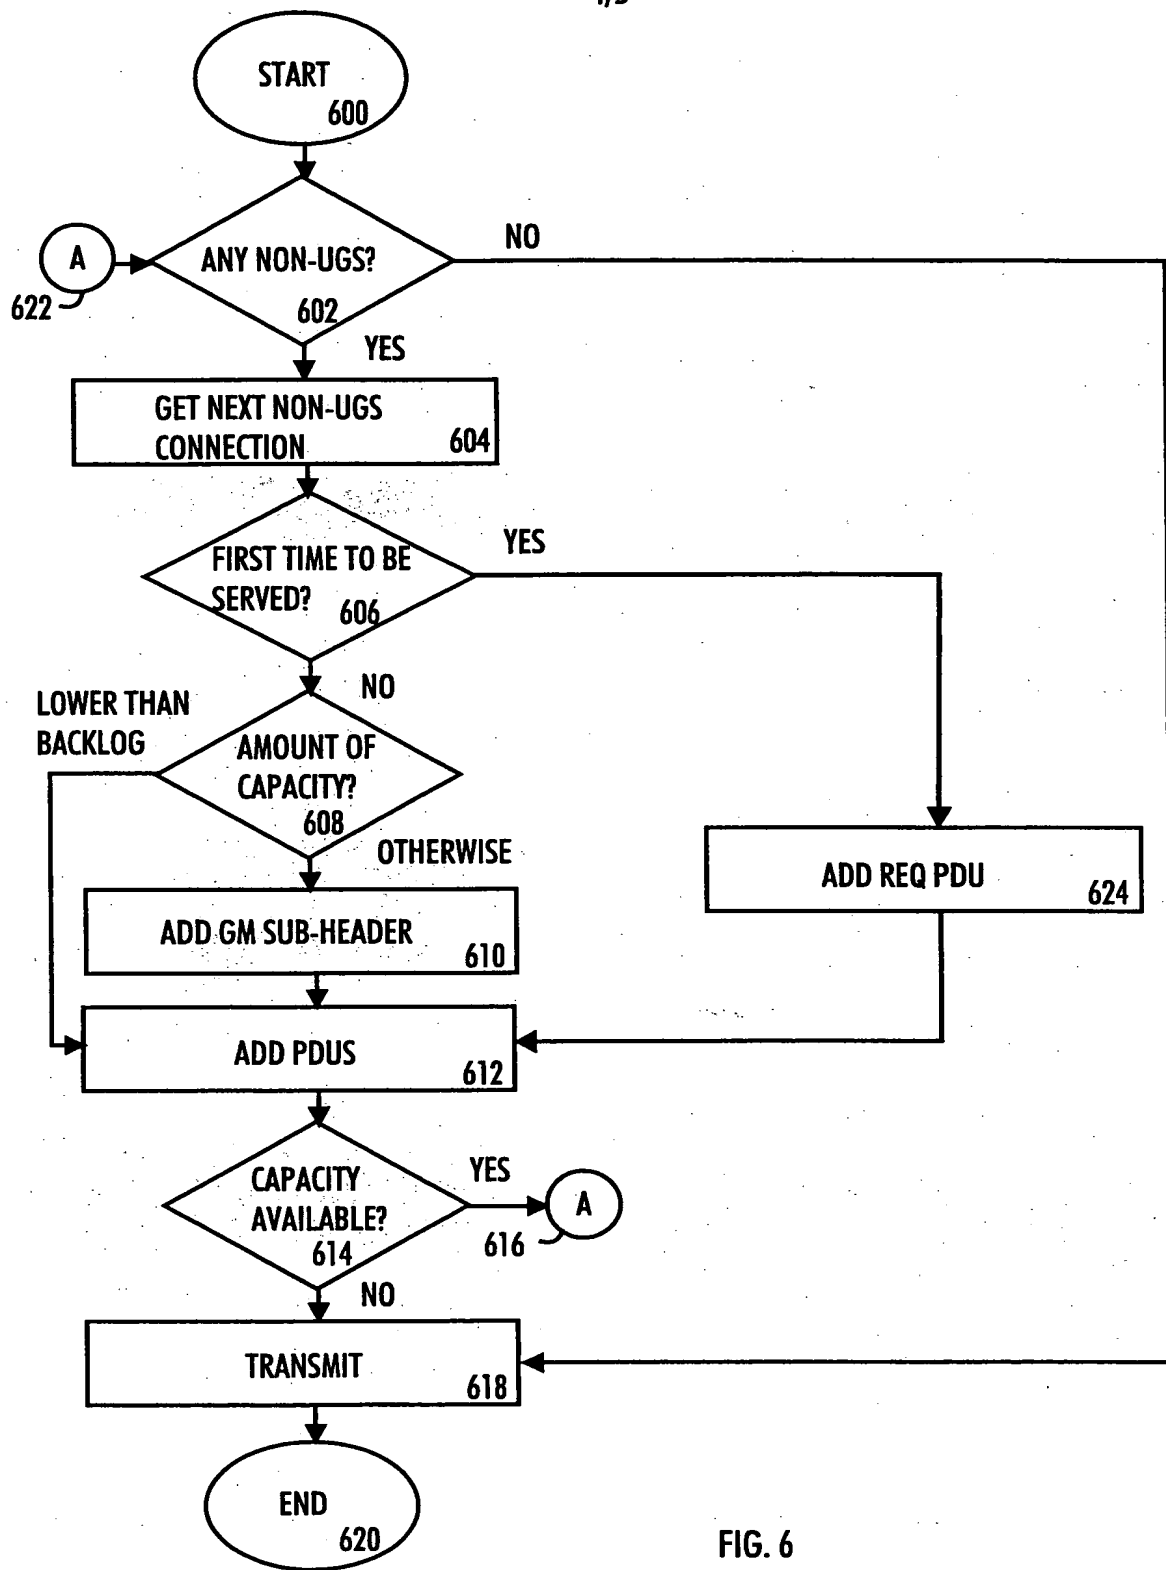


FIG. 6

FIG. 5

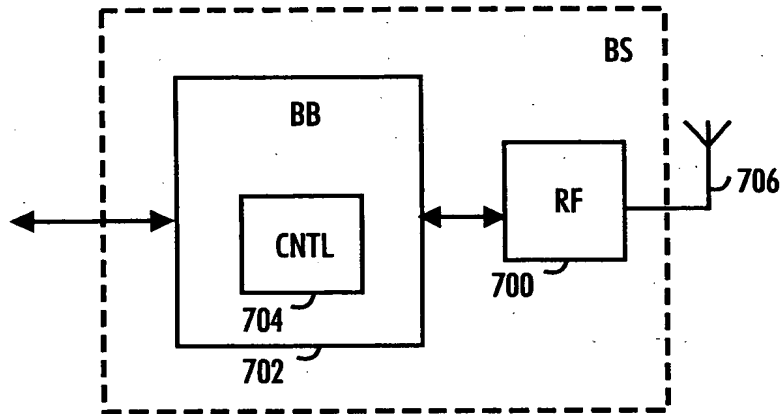
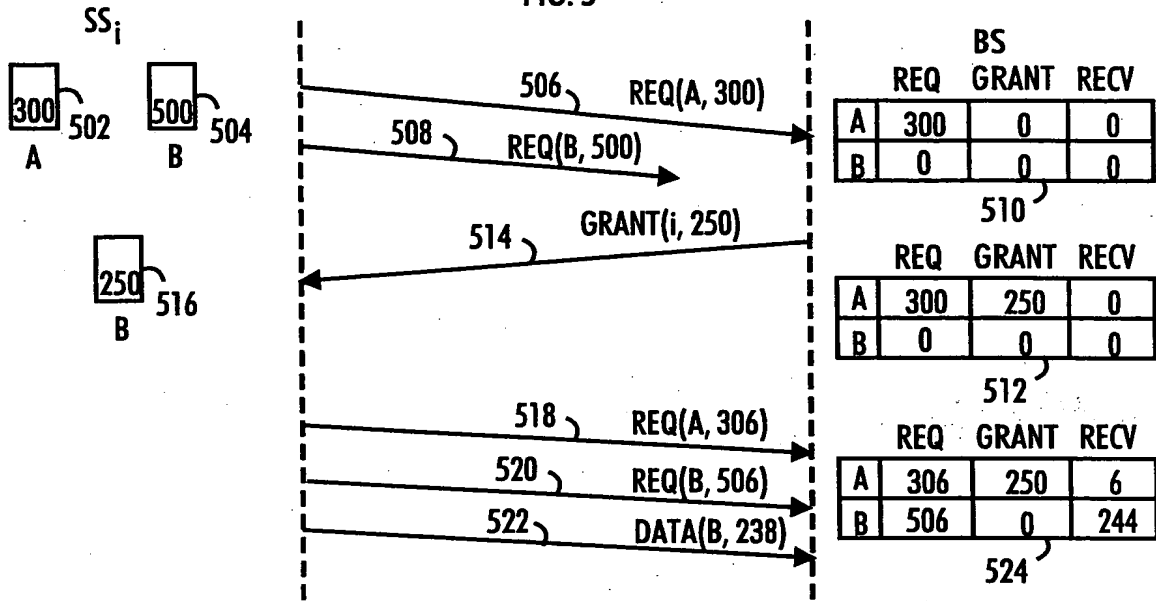


FIG. 7

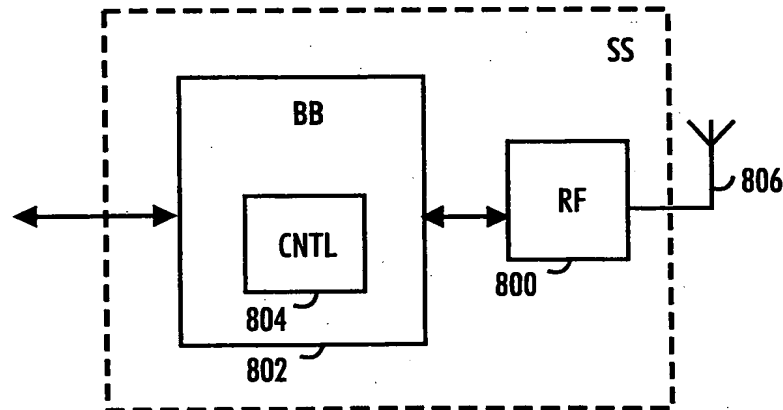


FIG. 8